


ASHLY

SRA-TR2 60W/70V Transformer Option

Features:

- Designed Specifically for the SRA-120
- Mounted, Dual 60W/70V Transformers and Terminal Strip
- Secondary Wiring Terminated to #8 Screw Terminal Block
- 14" 20 ga. Input Wire

The Ashly SRA-TR2 60W/70V transformer option allows the Ashly SRA-120 power amplifier to drive 70 volt distributed sound loads. Mount the transformer option directly next to an SRA-120 for connecting to the amplifier outputs. Separate transformers are used for channel one and channel two. Transformer input wires are pre-stripped for connecting to the SRA-120 binding posts, while 70 volt transformer outputs are factory wired to #8 screw terminals for speaker wire connections. The following diagram shows the proper use of the SRA-TR2. Please note that the SRA-TR2 is not compatible with other power amplifiers, only the Ashly SRA-120.

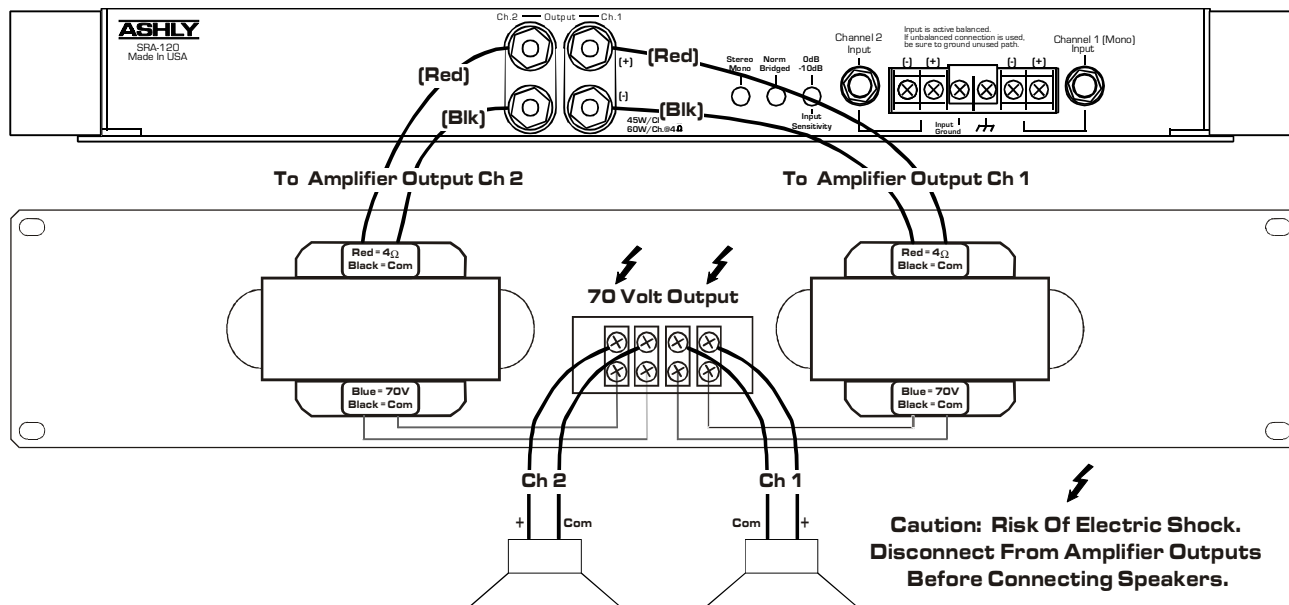

Specifications:

Maximum Wattage: 60 Watts (RMS) • **Input:** 4 ohms • **Output:** 70.7 Volts RMS •
Frequency Response: 50~15,000 Hz, +/- 2dB • **Insertion Loss:** 0.5dB • **Termination:** 14", UL1015, 20 ga. lead wire • **Dimensions:** 19.0" W x 3.5" H x 3.0" D • **Net Weight:** 5.0 lbs. • **Shipping Weight:** 7.0 lbs.

ASHLY AUDIO INC.

847 Holt Road Webster, NY 14580-9103 Phone: (585) 872-0010
Toll-Free: (800) 828-6308 Fax: (585) 872-0739
www.ashly.com